

Routing

wangth (2018-2021, CC BY-SA)



? (2009-2017)

國立陽明交通大學資工系資訊中心

Computer Center of Department of Computer Science, NYCU


Why dynamic route ? (1)

- Static route is ok only when
 - Network is small
 - There is a single connection point to other network
 - No redundant route

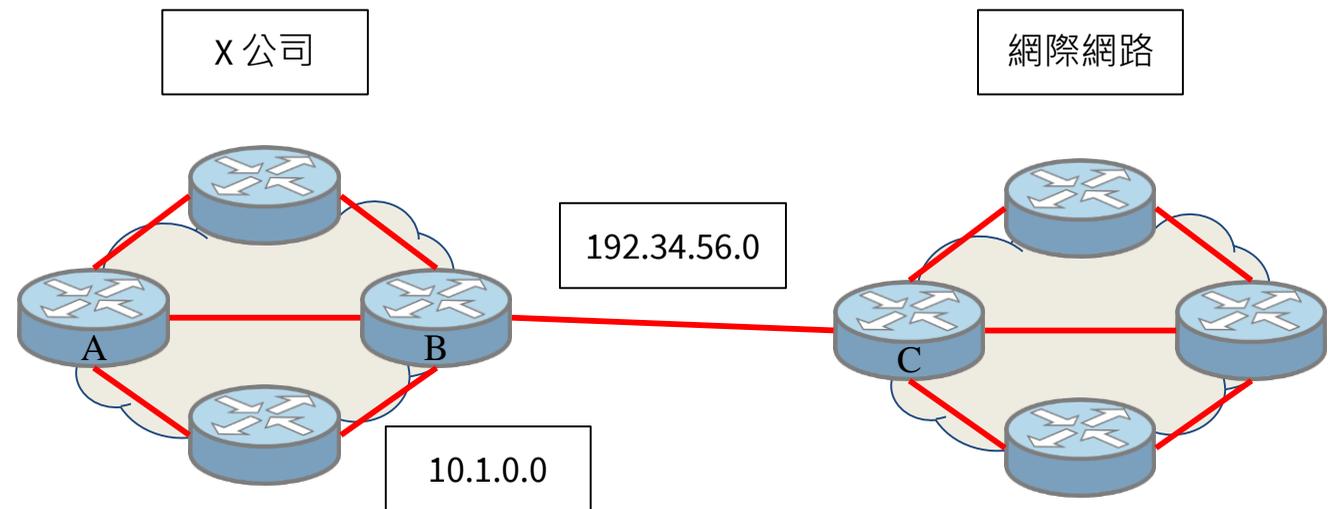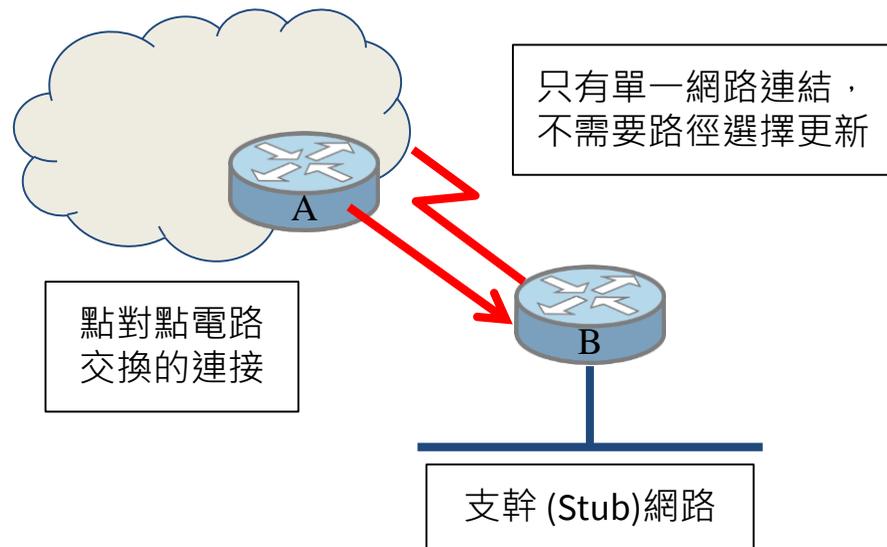

Why dynamic route ? (2)

- Dynamic Routing
 - Routers update their routing table with the information of adjacent routers
 - Dynamic routing need a routing protocol for such communication
 - Advantage
 - They can react and adapt to changing network condition


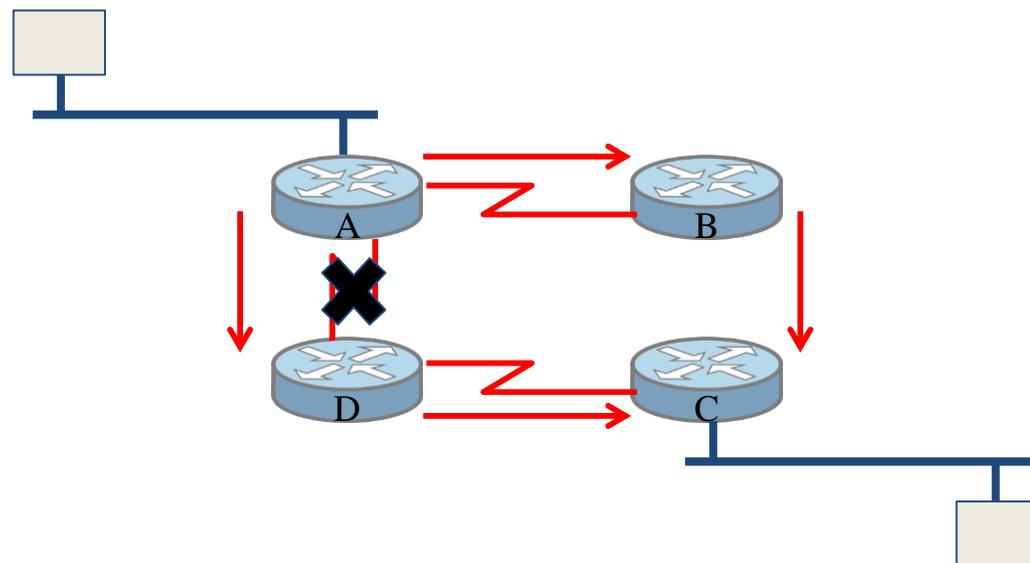


Routing Protocol

- Used to change the routing table according to various routing information
 - Specify detail of communication between routers
 - Specify information changed in each communication
 - Network reachability
 - Network state
 - Metric
- Metric
 - A measure of how good a particular route
 - Hop count, bandwidth, delay, load, reliability, ...
- Each routing protocol may use different metric and exchange different information


Autonomous System

- Autonomous System (AS)
 - Internet is organized into a collection of autonomous system
 - An AS is a collection of networks with same routing policy
 - Single routing protocol
 - Normally administered by a single entity
 - Corporation or university campus
 - All depend on how you want to manage routing

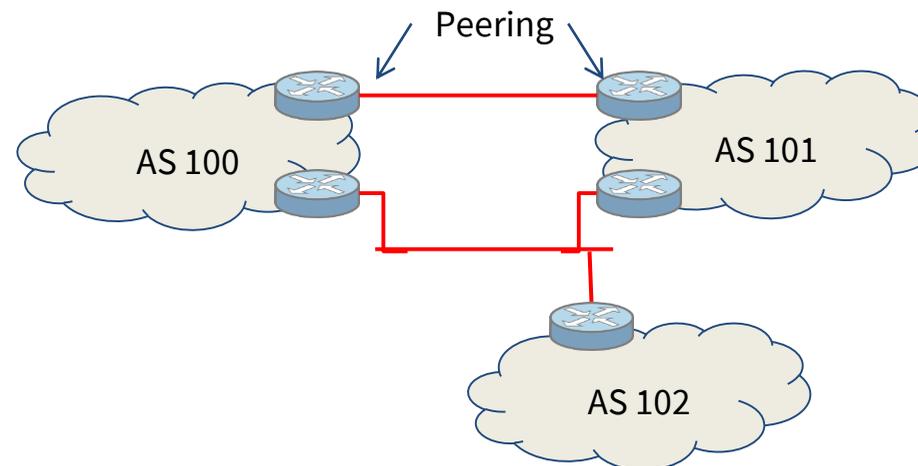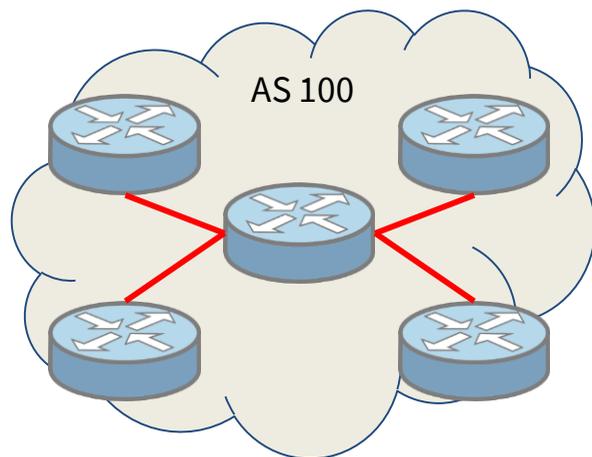


Category of Routing Protocols – by AS

- AS-AS communication
 - Communications between routers in different AS
 - Interdomain routing protocols
 - Exterior gateway protocols (EGP)
 - Ex:
 - BGP (Border Gateway Protocol)
- Inside AS communication
 - Communication between routers in the same AS
 - Intradomain routing protocols
 - Interior gateway protocols (IGP)
 - Ex:
 - RIP (Routing Information Protocol)
 - IGRP (Interior Gateway Routing Protocol)
 - OSPF (Open Shortest Path First Protocol)

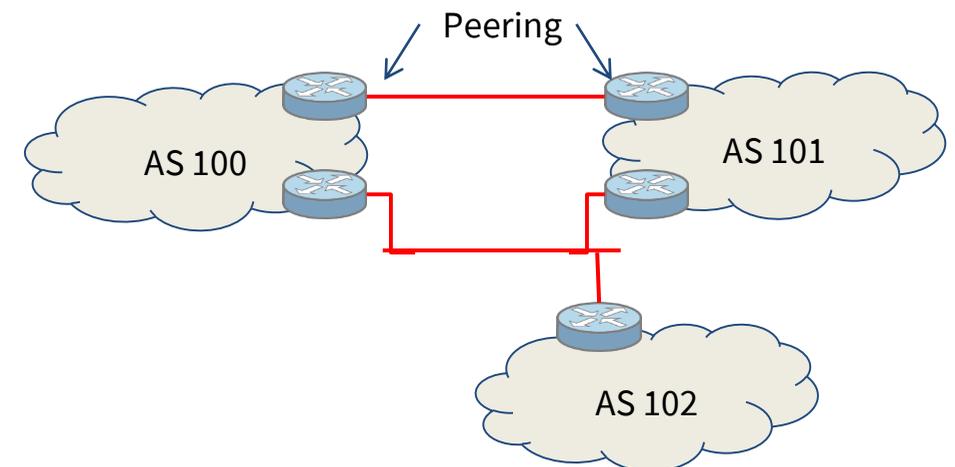


Intra-AS and Inter-AS routing

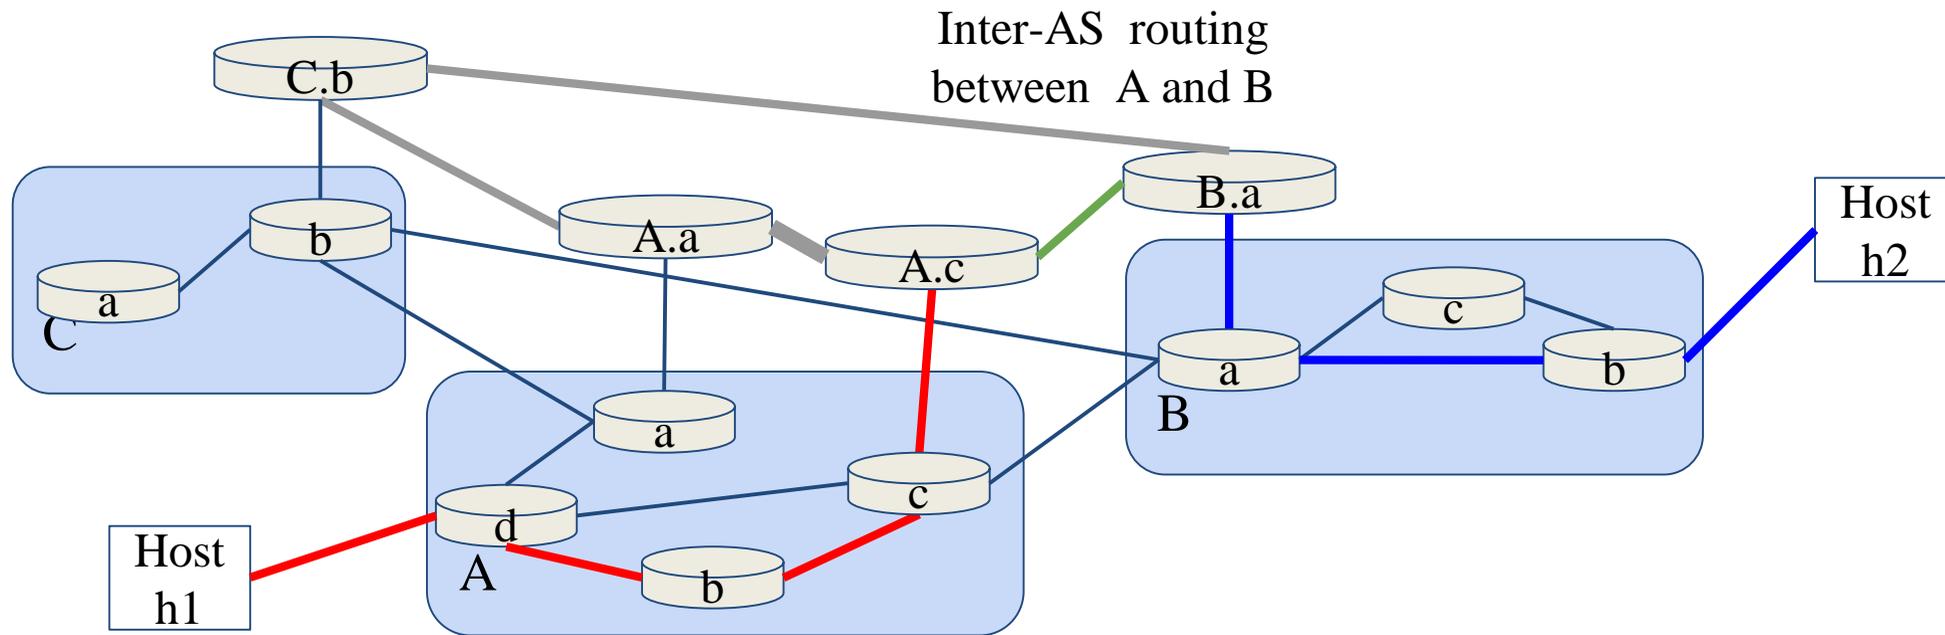

Intra-AS routing within AS A

Inter-AS, Intra-AS routing in gateway A.c

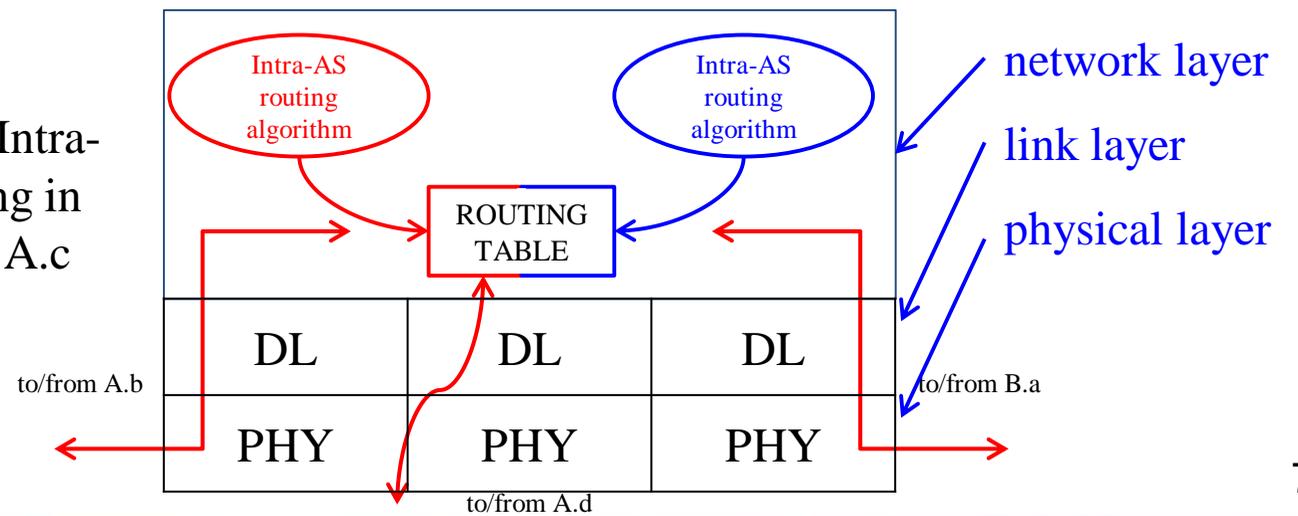


Category of Routing Protocols – by information changed (1)

- Distance-Vector Protocol

- Message contains a vector of distances, which is the cost to other network
- Each router updates its routing table based on these messages received from neighbors

- Protocols

- RIP
- IGRP
- BGP

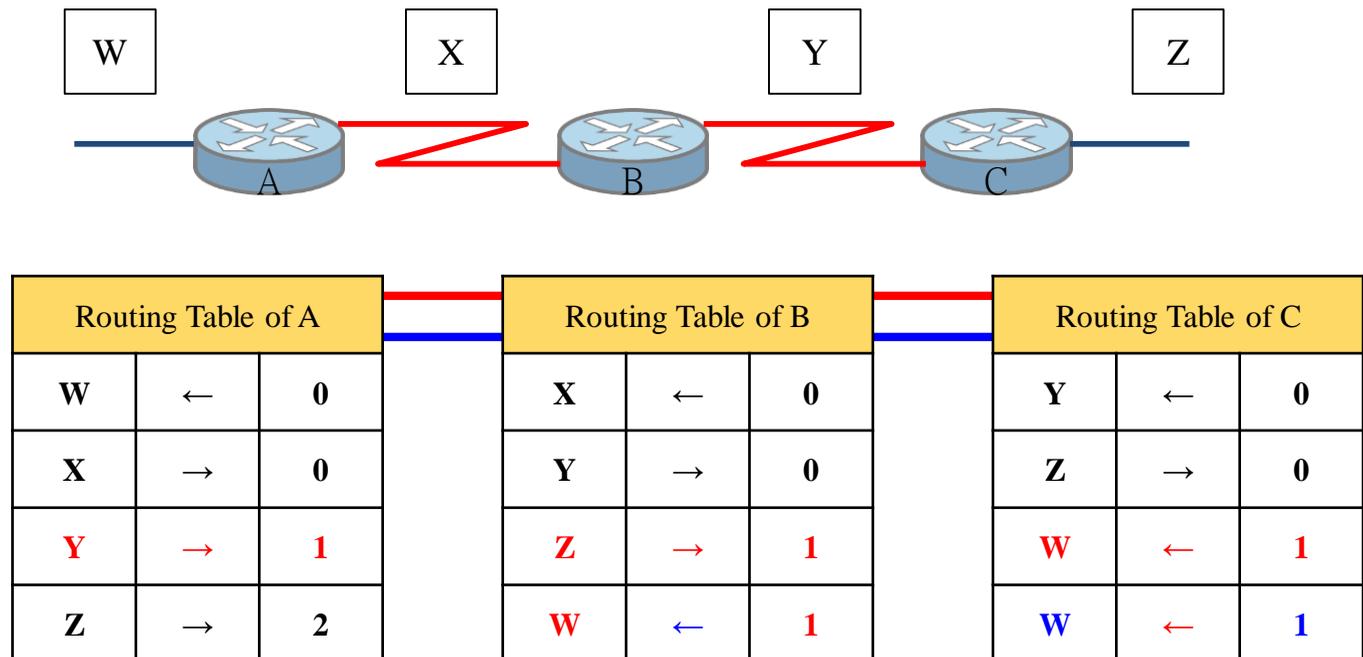


Category of Routing Protocols – by information changed (2)

- Link-State Protocol

- Broadcast their link state to neighbors and build a complete network map at each router using Dijkstra algorithm

- Protocol

- OSPF


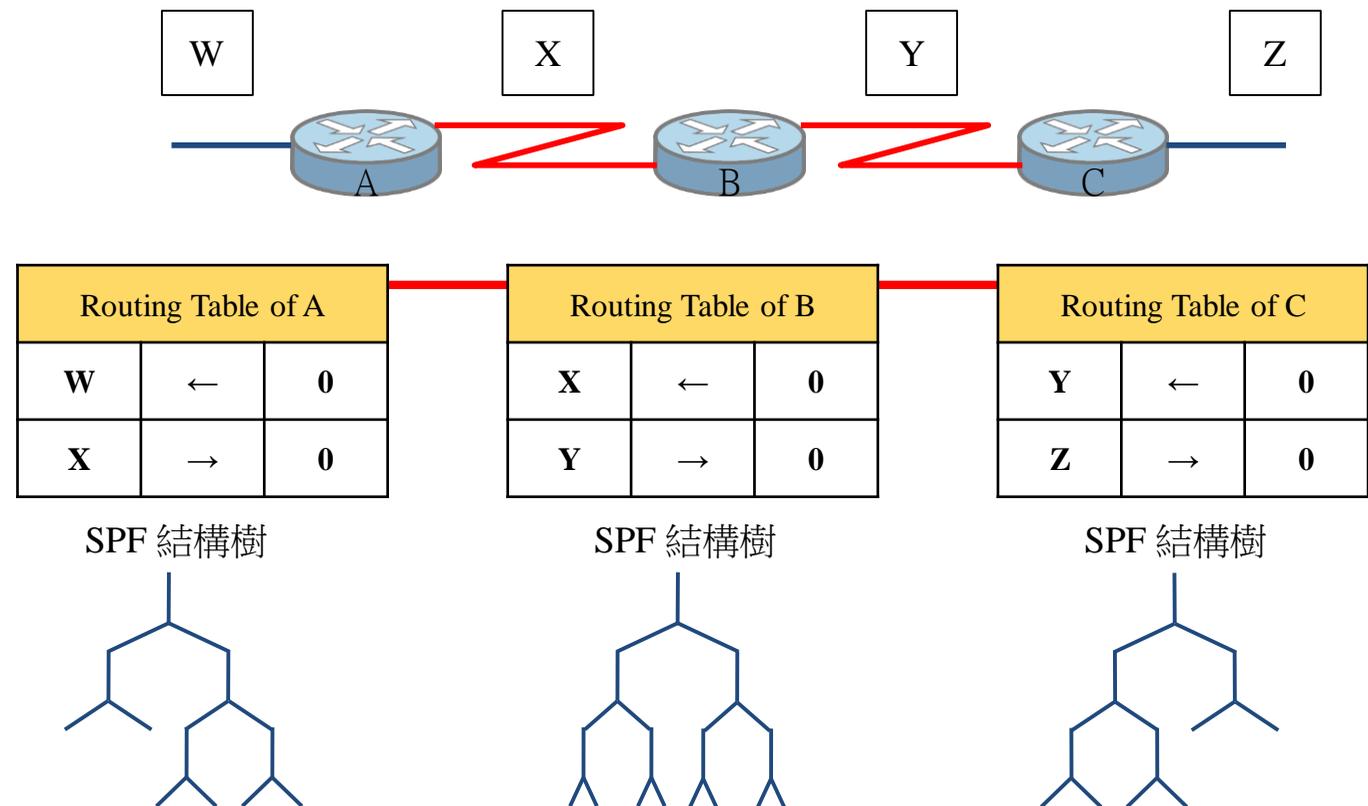


Difference between Distance-Vector and Link-State

- Difference

	Distance-Vector	Link-State
Update	Updates neighbor (propagate new info.)	Update all nodes
Convergence	Propagation delay cause slow convergence	Fast convergence
Complexity	Simple	Complex

- Information update sequence

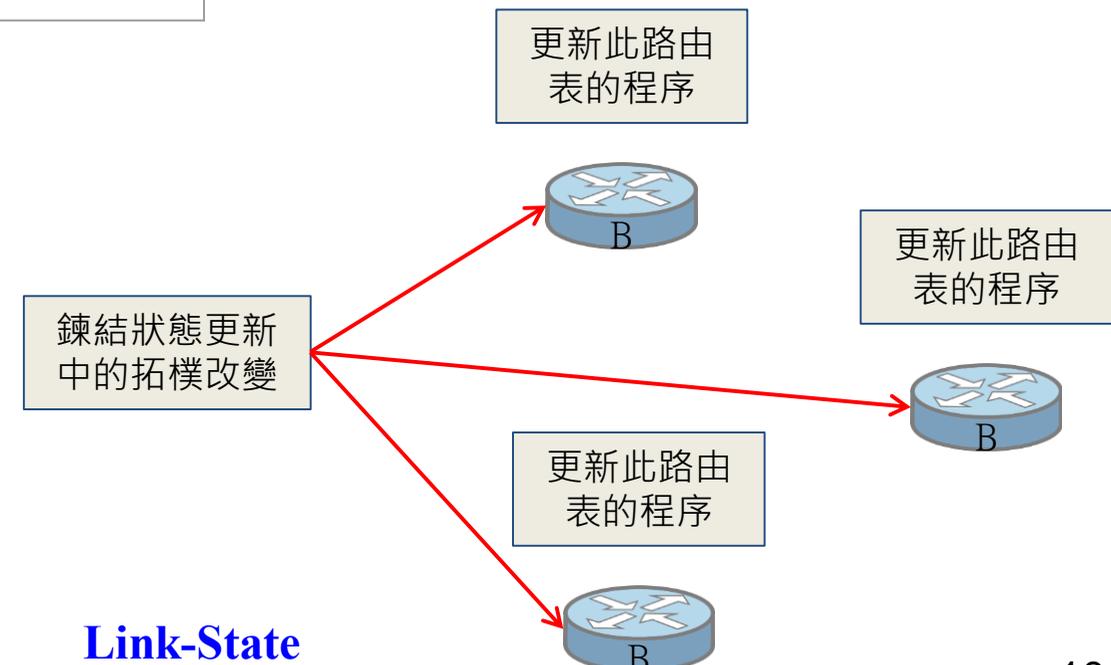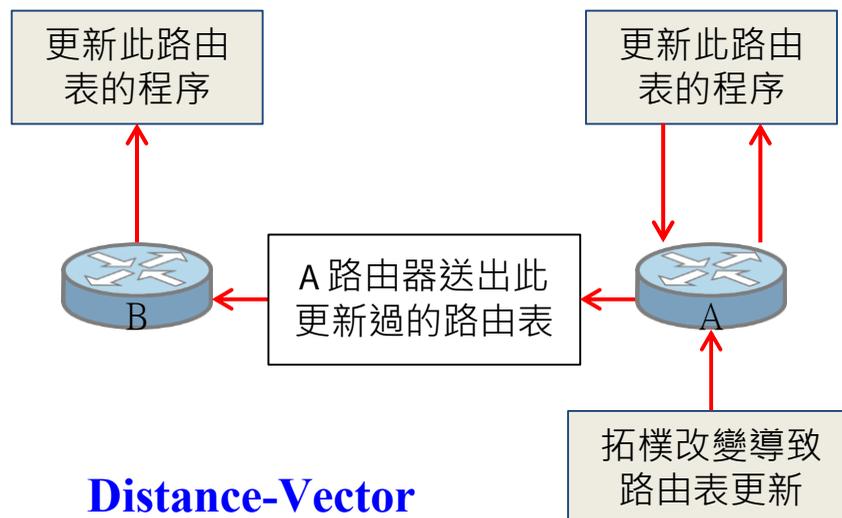

Routing Protocols

RIP IGP,DV
IGRP IGP,DV
OSPF IGP,LS
BGP EGP

國立陽明交通大學資工系資訊中心

Computer Center of Department of Computer Science, NYCU

RIP

- RIP
 - Routing Information Protocol
- Category
 - Interior routing protocol
 - Distance-vector routing protocol
 - Using “hop-count” as the cost metric
- Example of how RIP advertisements work

Destination network	Next router	# of hops to destination
1	A	2
20	B	2
30	B	7

Routing table in router before
Receiving advertisement

Destination network	Next router	# of hops to destination
30	C	4
1	--	1
10	--	1


Advertisement from router A

Destination network	Next router	# of hops to destination
1	A	2
20	B	2
30	A	5

Routing table after
receiving advertisement


RIP - Example

- Another Example

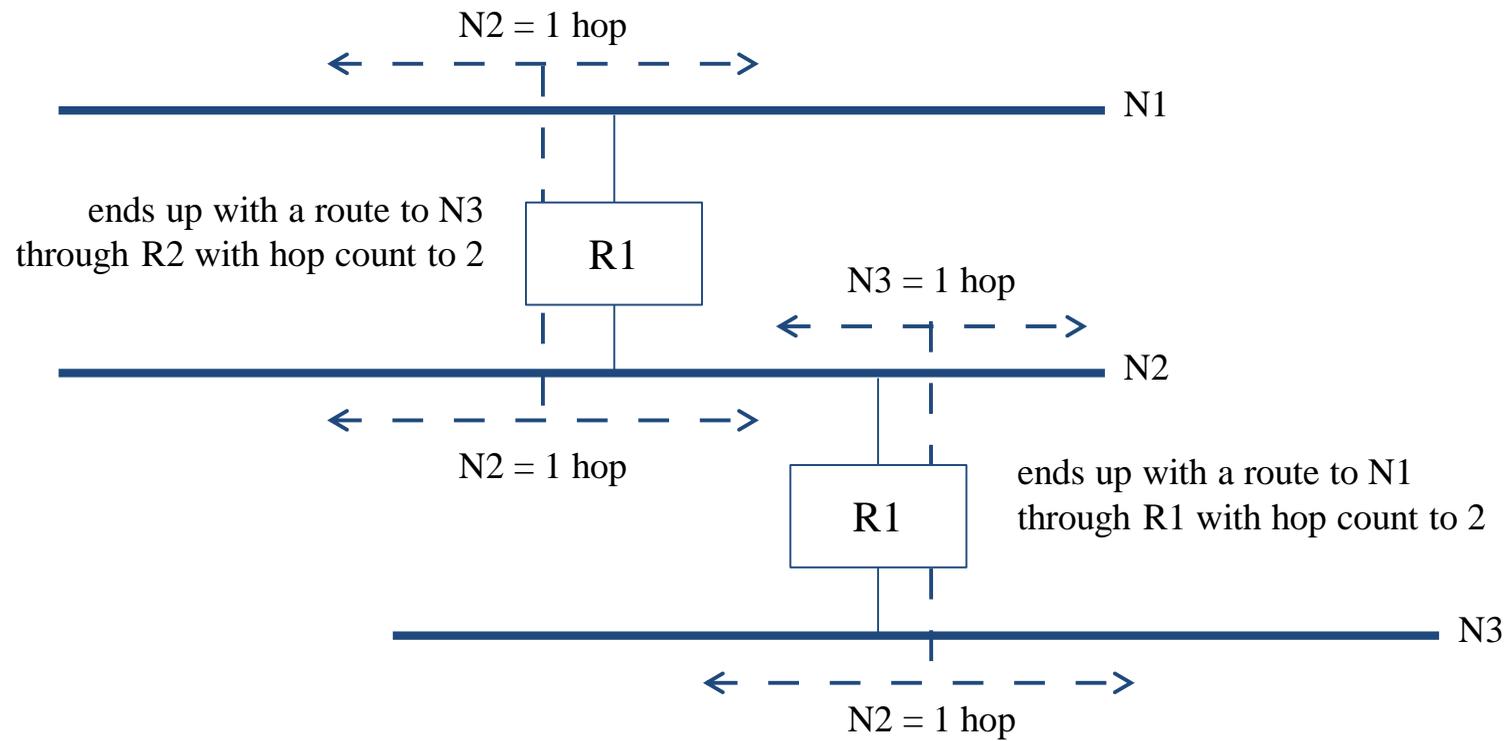

RIP – Message Format

- RIP message is carried in UDP datagram
 - Command: 1 for request and 2 for reply
 - Version: 1 or 2 (RIP-2)

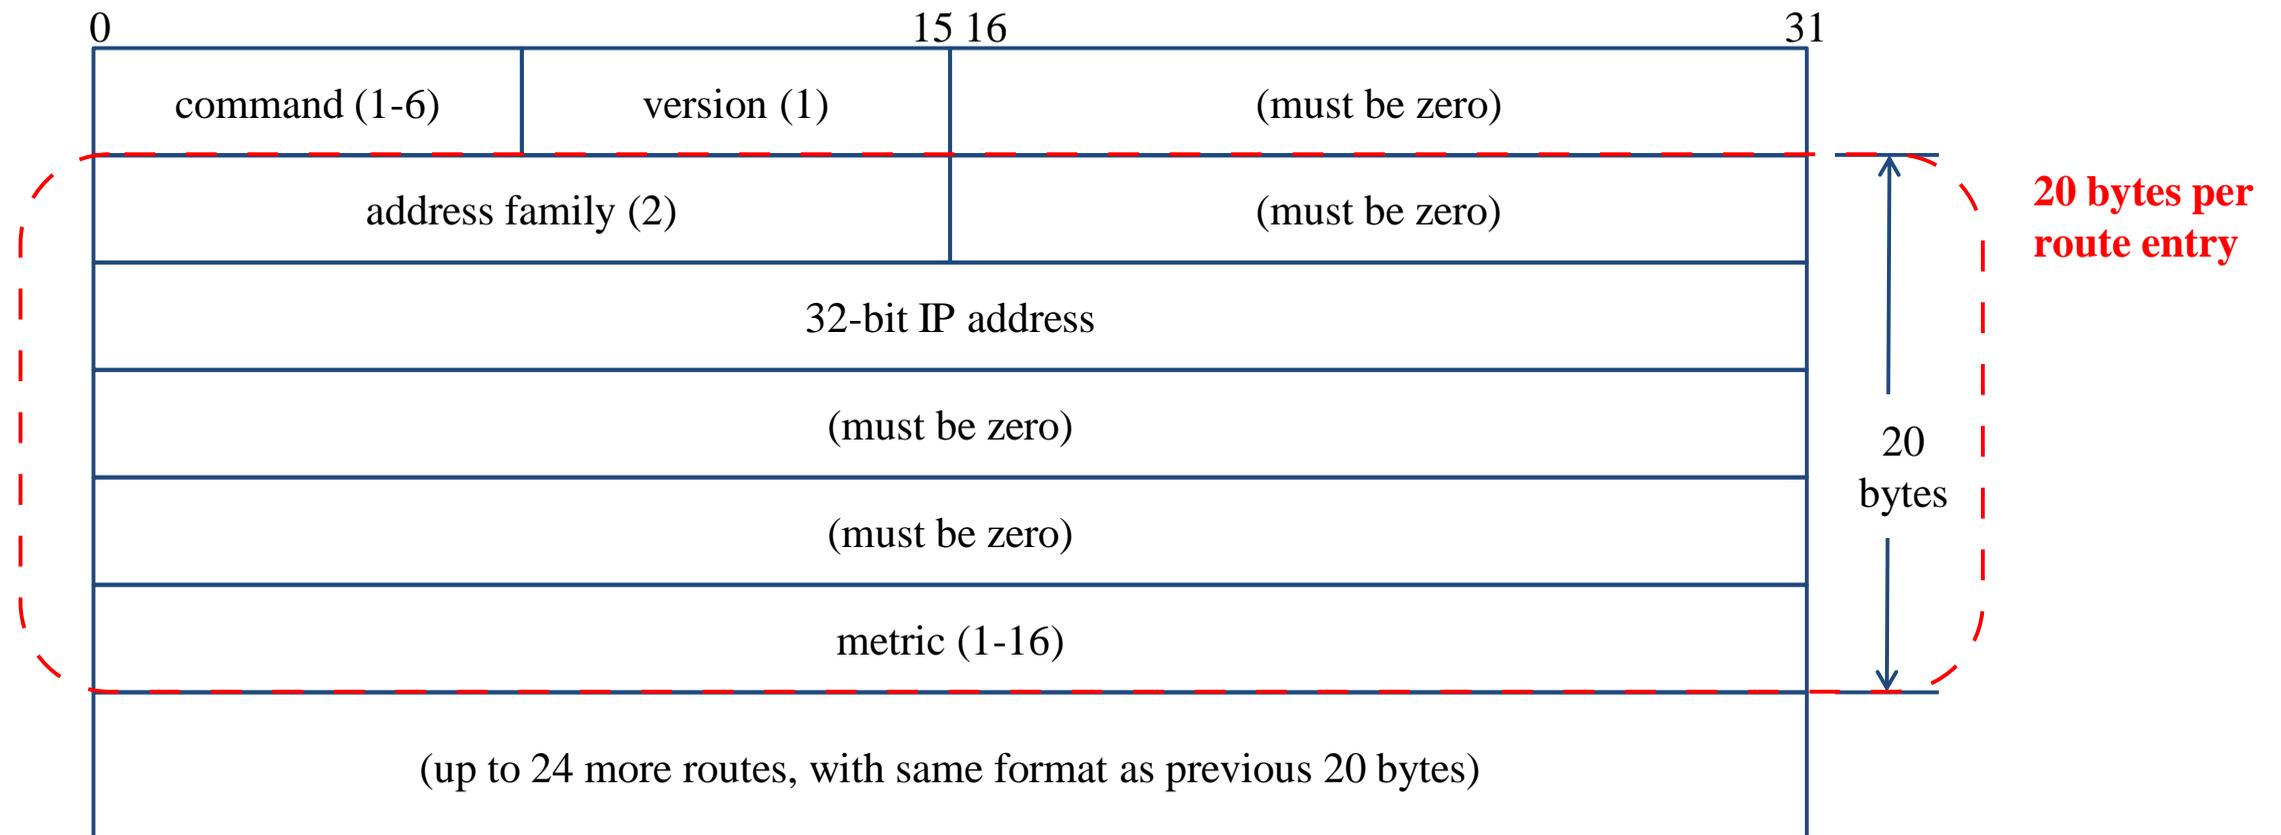

RIP – Operation


- routed – RIP routing daemon
 - Operated in UDP port 520
- Operation
 - Initialization
 - Probe each interface
 - send a request packet out each interface, asking for other router's complete routing table
 - Request received
 - Send the entire routing table to the requestor
 - Response received
 - Add, modify, delete to update routing table
 - Regular routing updates
 - Router sends out their routing table to every neighbor every 30 seconds
 - Triggered updates
 - Whenever a route entry's metric change, send out those changed part routing table

RIP – Problems of RIP

- Issues
 - 15 hop-count limits
 - Take long time to stabilize after the failure of a router or link
 - No CIDR

- RIP-2

- EGP support
 - AS number
- CIDR support

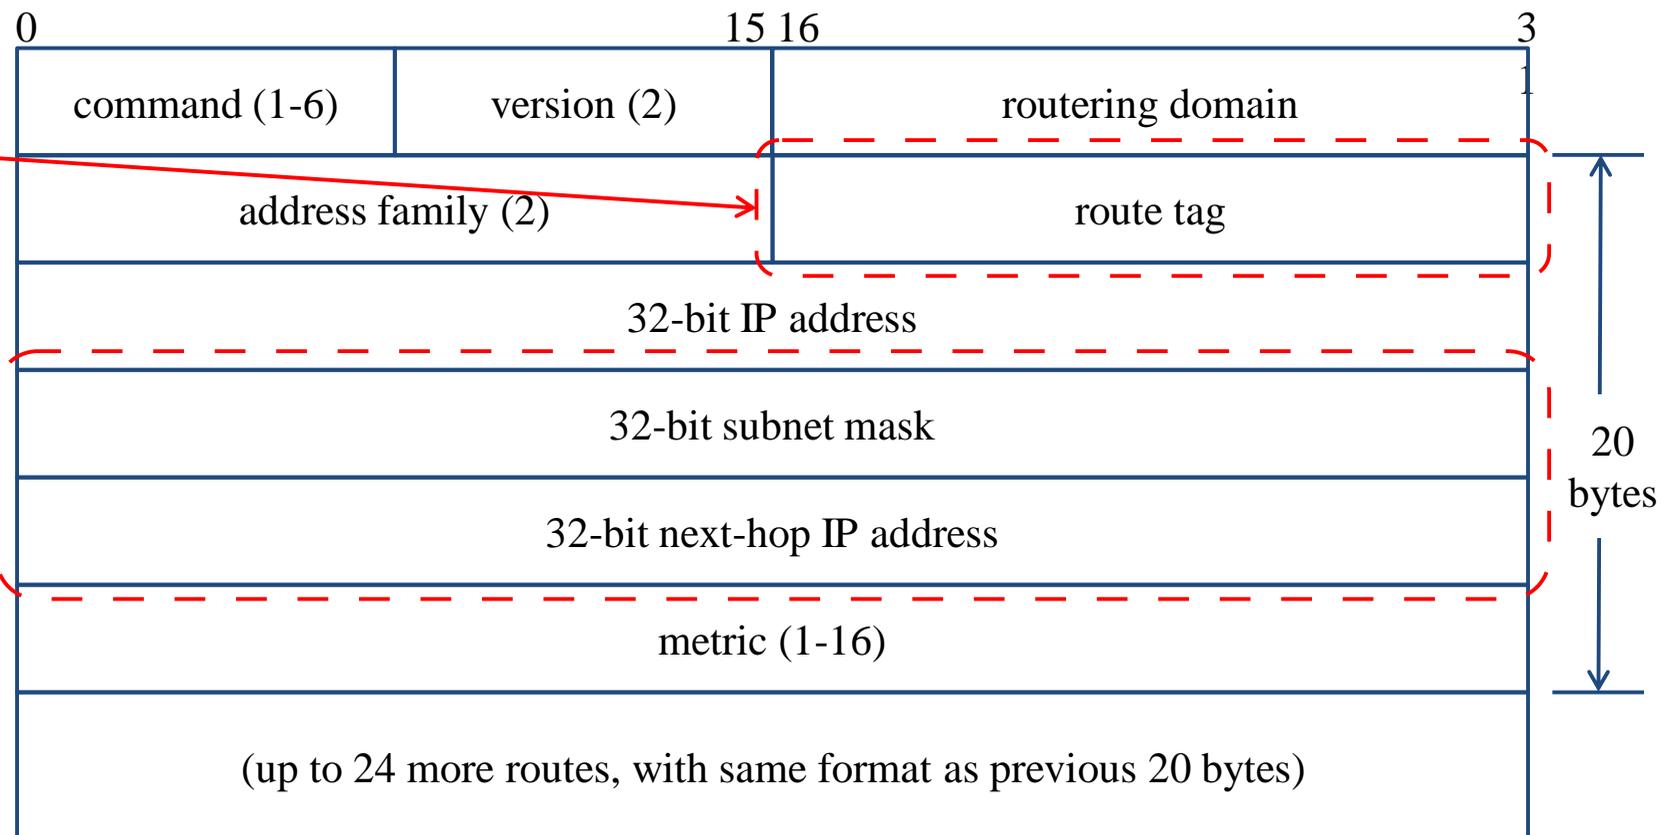

IGRP (1)

- IGRP – Interior Gateway Routing Protocol
- Similar to RIP
 - Interior routing protocol
 - Distance-vector routing protocol
- Difference between RIP
 - Complex cost metric other than hop count
 - delay time, bandwidth, load, reliability
 - The formula
$$\left(\frac{\textit{bandwidth_weight}}{\textit{bandwidth} * (1 - \textit{load})} + (\textit{delay_weight} * \textit{delay}) \right) * \textit{reliability}$$
 - Use TCP to communicate routing information
 - Cisco System's proprietary routing protocol

IGRP (2)

- Advantage over RIP
 - Control over metrics
- Disadvantage
 - Still classful and has propagation delay







OSPF (1)

- OSPF
 - Open Shortest Path First
- Category
 - Interior routing protocol
 - Link-State protocol
- Each interface is associated with a cost
 - Generally assigned manually
 - The sum of all costs along a path is the metric for that path
- Neighbor information is broadcast to all routers
 - Each router will construct a map of network topology
 - Each router run Dijkstra algorithm to construct the shortest path tree to each routers

OSPF – Dijkstra Algorithm

- Single Source Shortest Path Problem
 - Dijkstra algorithm use “greedy” strategy


○ Ex:

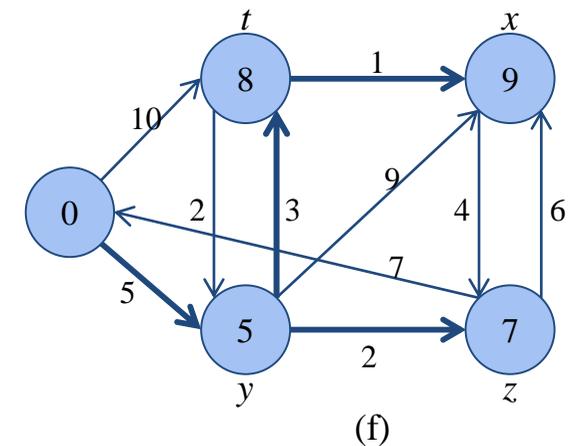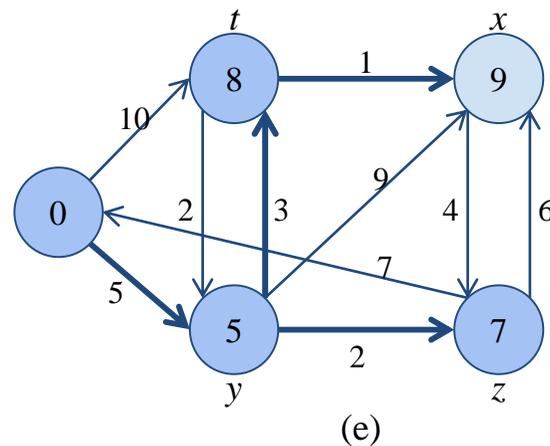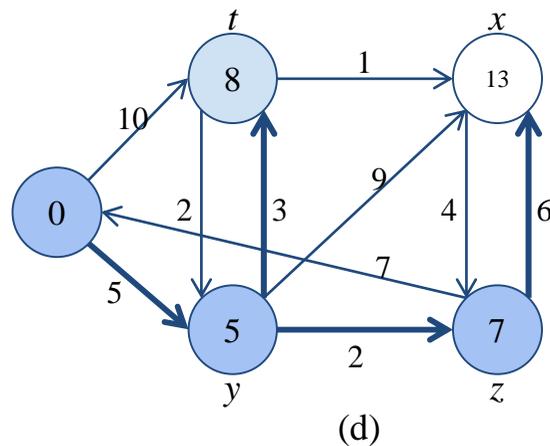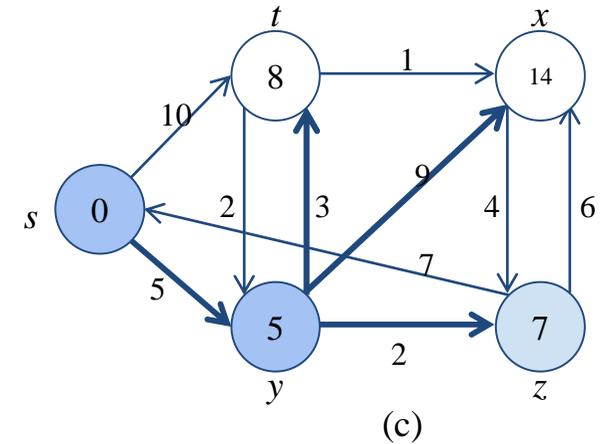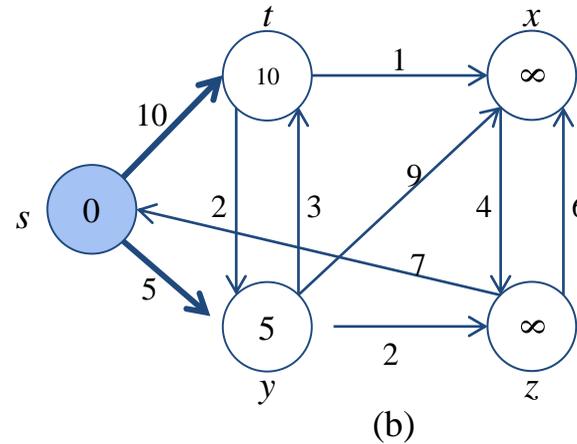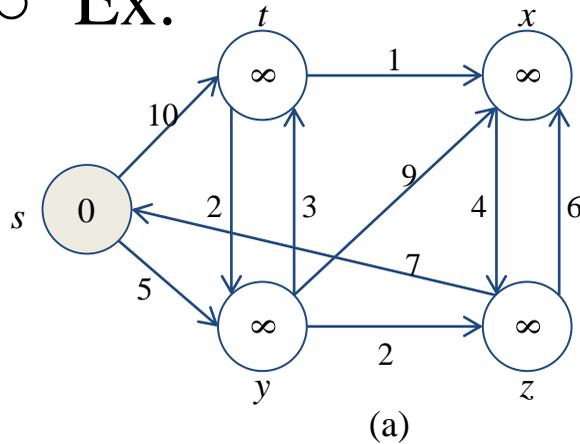

OSPF – Routing table update example (1)


R1

D	Path	M
R1	?	
R2		
R3		
R4		

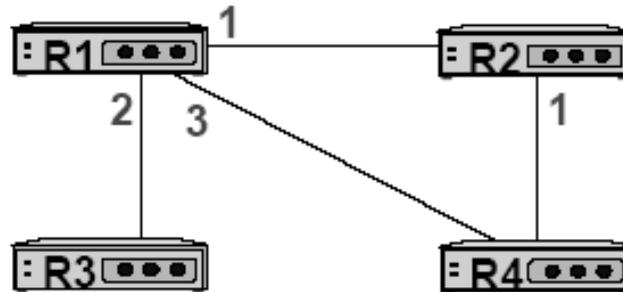


R1

D	Path	M
R1	direct	0
R2	R1-R2	1
R3	R1-R3	2
R4	R1-R4	3

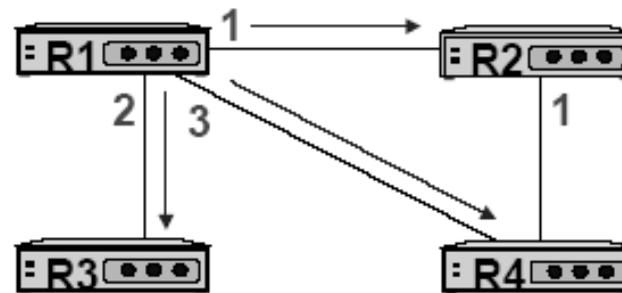

R1


D	Path	M
R1	direct	0
R2	R1-R2	1
R3	R1-R3	2
R4	R1-R4	3

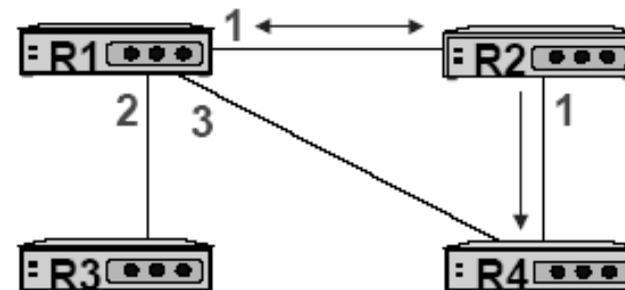

OSPF – Routing table update example (2)


R1

D	Path	M
R1	direct	0
R2	R1-R2	1
R3	R1-R3	2
R4	R1-R4	3

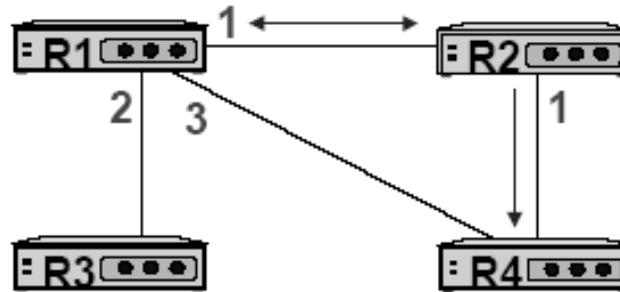


R1

D	Path	M
R1	direct	0
R2	R1-R2	1
R3	R1-R3	2
R4	R1-R2-R4	2

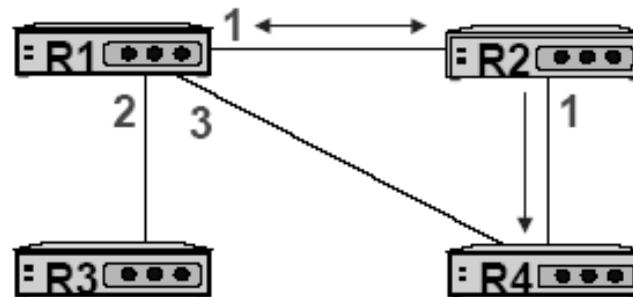

R1

D	Path	M
R1	direct	0
R2	R1-R2	1
R3	R1-R3	2
R4	R1-R2-R4	2

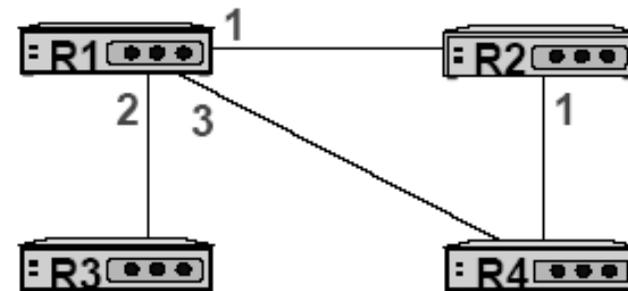

OSPF – Summary


- Advantage
 - Fast convergence
 - CIDR support
 - Multiple routing table entries for single destination, each for one type-of-service
 - Load balancing when cost are equal among several routes
- Disadvantage
 - Large computation

BGP

- BGP
 - Border Gateway Protocol
- Exterior routing protocol
 - Now BGP-4
 - Exchange network reachability information with other BGP systems
- Routing information exchange
 - Message:
 - Full path of autonomous systems that traffic must transit to reach destination
 - Can maintain multiple route for a single destination
 - Exchange method
 - Using TCP
 - Initial: entire routing table
 - Subsequent update: only sent when necessary
 - Advertise only optimal path
- Route selection
 - Shortest AS path

BGP – Operation Example

- How BGP work
 - The whole Internet is a graph of autonomous systems
 - $X \Rightarrow Z$
 - Original: $X \Rightarrow A \Rightarrow B \Rightarrow C \Rightarrow Z$
 - X advertise this best path to his neighbor W
 - $W \Rightarrow Z$
 - $W \Rightarrow X \Rightarrow A \Rightarrow B \Rightarrow C \Rightarrow Z$

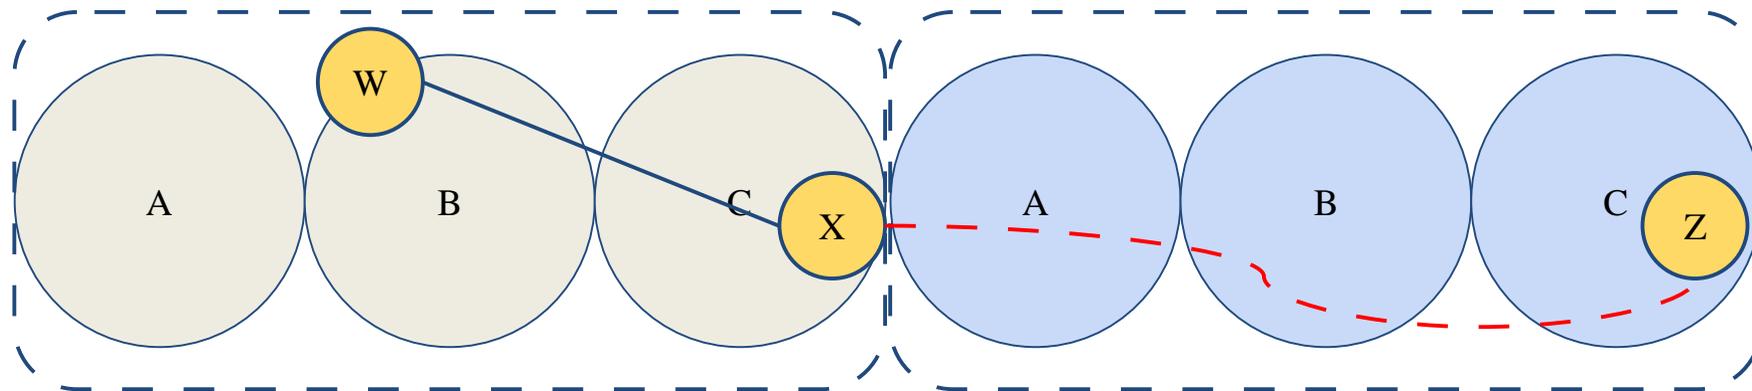

Routing Protocols Comparison

	RIP	IGRP	OSPF	BGP4
DV or LS	DV	DV	LS	Path Vec
TCP/UDP & Port	U-520	IP-9	T-89	T-179
Classless	No	No	Yes	Yes
Updates	Per.	Per.	Both	Trig.
Load Balance	No	Yes	Yes	No
Internal / External	Int.	Int.	Int.	Ext.
Metric	Hop Count	Load Errors Delay Bandwidth	Sum of Int. Cost	Short. AS Path

routed

國立陽明交通大學資工系資訊中心

Computer Center of Department of Computer Science, NYCU

routed

- Routing daemon
 - Speak RIP (v1 and v2)
 - Supplied with most every version of UNIX
 - Two modes
 - Server mode (-s) & Quiet mode (-q)
 - Both listen for broadcast, but server will distribute their information
 - routed will add its discovered routes to kernel's routing table
 - Support configuration file - /etc/gateways
 - Provide static information for initial routing table